





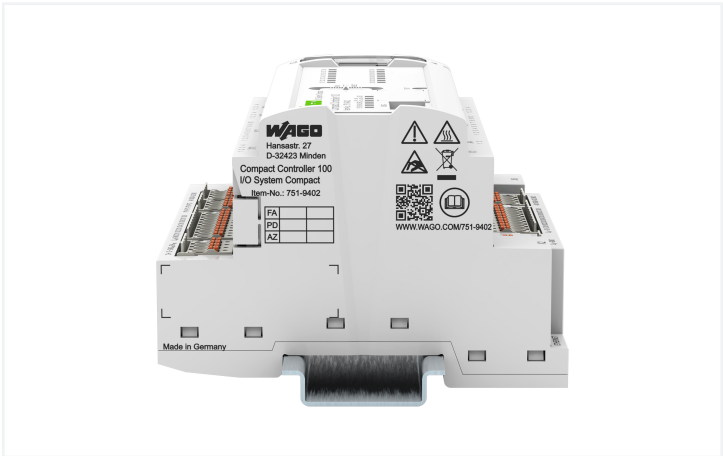

Technical data	
Communications	Modbus (TCP, UDP) EtherCAT® Master EtherNet/IP™ Adapter (slave) EtherNet/IP™ Scanner Modbus RTU OPC UA Server/Client OPC UA Pub/Sub (can be installed later) MQTT RS-485 interface BACnet/IP, requires an additional license Telecontrol protocols, requires an additional license
ETHERNET protocols	DHCP DNS NTP FTP FTPS SNMP HTTP HTTPS SSH
Telecontrol protocols	IEC 60870 (additional license as slave or master) IEC 61850 (additional license as Client or Server) DNP3 (additional license as Slave or Master)
Visualization	Web-Visu
Operating system	Real-time Linux (with PREEMPT_RT patch)
CPU	2 x Cortex A7; 650 MHz
Programming languages per IEC 61131-3	Instruction List (IL) Ladder Diagram (LD) Continuous Function Chart (CFC) Structured Text (ST) Sequential Function Chart (SFC)
Programming environment	CODESYS V3.5 Node RED
Configuration options	CODESYS V3.5 Ethernet Settings Web-Based Management WAGOupload WAGO Solution Builder
Transmission rate	10/100 Mbit/s
Transmission medium (communication/fieldbus)	Twisted pair S-UTP; 100 Ω; Cat. 5; 100 m maximum cable length
Main memory (RAM)	512 MB
Internal memory (flash)	4096 MB
Non-volatile hardware memory	128 KB
Program memory	32 MB
Data memory	128 MB
Non-volatile software memory	128 KB
Type of memory card	microSD up to 32 GB (all guaranteed properties only valid with WAGO's memory card)
Memory Card Slot	Push-push mechanism
Indicators	LED (SYS, RUN), red/green: System status; LED (USR), red/green: User-programmable status (accessible via CODESYS library); LED (μSD), orange: microSD card status; LED (LNK/ACT), green: Network connection status via ports 1 ... 2; LED (DI1 ... 8), green: Status of inputs; LED (DO1 ... 8) green: Status of inputs and outputs
Control Elements	Operating mode switch (RUN, STOP, RESET); reset button
Supply voltage (system)	24 VDC (-15 ... +20 %); Via wiring interface (<i>picoMAX</i> ® 3.5; Push-in CAGE CLAMP® connection)
Current consumption (system) max.	600 mA
Supply voltage (field)	24 VDC (-15 ... +20 %); Via wiring interface (<i>picoMAX</i> ® 3.5; Push-in CAGE CLAMP® connection)
Field current consumption max. (digital outputs) $U_{in}+$	4000 mA
Isolation	1250 V (DC 1 min., between system and field level (digital outputs))

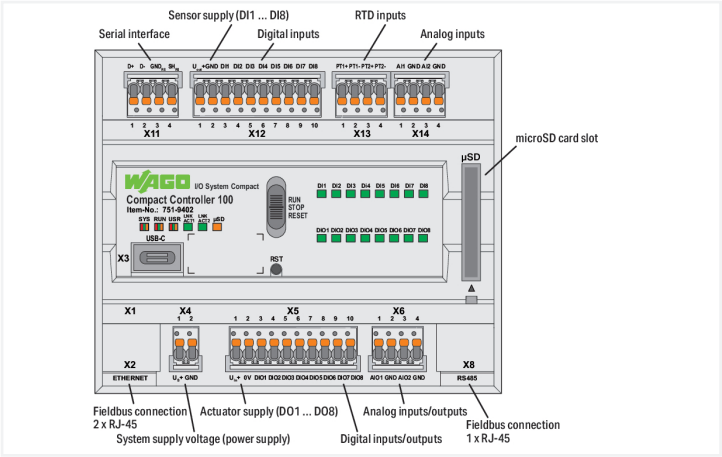

Technical Data (Inputs/Outputs)

Digital inputs/outputs	
Number of configurable digital inputs/ outputs	8
Signal type	Voltage
Output current (per channel)	500 mA (DC)
Input characteristic	Type 3 (per EN 61131-2)

Digital inputs	
Number of digital inputs	8
Input characteristic	Type 3 (per EN 61131-2)

Analog inputs/outputs	
Number of analog inputs/outputs (configurable)	2
Resolution of analog inputs	16 bits
Input signal (current)	0 ... 20 mA; 4 ... 20 mA; 3.6 ... 21 mA
Input signal (voltage)	0 ... 10 V; ±10 V
Resolution of analog outputs	12 bits
Output signal (current)	0 ... 20 mA; 4 ... 20 mA; 0 ... 22 mA
Output signal (voltage)	0 ... 10 V; ± 12 V; ± 10 V
Load impedance (voltage output)	≥ 1 kΩ
Load impedance (current output)	≤ 500 Ω

Analog inputs	
Number of analog inputs	2
Resolution of analog inputs	16 bits
Input signal (current)	0 ... 20 mA; 4 ... 20 mA; 3.6 ... 21 mA
Input signal (voltage)	0 ... 10 V; ±10 V

RTD inputs	
Number of measurement inputs	2
Sensor types	Pt100 (–200 °C ... +850 °C); Pt200 (–200 °C ... +850 °C); Pt500 (–200 °C ... +850 °C); Pt1000 (–200 °C ... +850 °C); Ni100 (–60 °C ... +250 °C); Ni1000 (TK6180 (–60 °C ... +250 °C); Ni1000 (TK5000) (–60 °C ... +250 °C); Ni120 (–80 °C ... +260 °C); Potentiometer 0 Ohm ... 1.2 kOhm; Potentiometer 0 Ohm ... 4 kOhm

Connection data	
Connection technology: communication/fieldbus	Modbus (TCP, UDP): 2 x RJ-45; RS-485 interface: 1 x RJ-45; RS-485 interface: 1 x Female connector, 4-pole; Push-in CAGE CLAMP®
Connection technology: system supply	1 x Female connector, 2-pole; Push-in CAGE CLAMP®
Connection technology: field supply	2 x Female connector, 10-pole; Push-in CAGE CLAMP®
Connectable conductor materials	Copper
Solid conductor	0.2 ... 1.5 mm² / 24 ... 14 AWG
Fine-stranded conductor	0.2 ... 1.5 mm² / 24 ... 14 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Physical data	
Width	108 mm / 4.252 inches
Height	90 mm / 3.543 inches
Depth from upper-edge of DIN-rail	55 mm / 2.165 inches



Mechanical data		
Mounting type		DIN-35 rail

Material data		
Housing material		Polycarbonate, polyamid
Fire load		0 MJ
Weight		205 g
Conformity marking		CE; UKCA

Environmental requirements		
Ambient temperature (operation)		-25 ... +60 °C
Ambient temperature (storage)		-25 ... +85 °C
Protection type		IP20
Pollution degree		2 per IEC 61131-2
Operating altitude		0 ... 2000 m / 0 ... 6562 ft
Mounting position		any
Relative humidity (without condensation)		95 %
Vibration resistance		1g per IEC 60068-2-6
Shock resistance		15g per IEC 60068-2-27
EMC immunity to interference		per EN 61000-6-2
EMC emission of interference		per EN 61000-6-3

Commercial data		
PU (SPU)		1 pcs
Packaging type		Box
Country of origin		DE
GTIN		4066966618754
Customs tariff number		85371091990

Product Classification		
UNSPSC		32151705
ETIM 9.0		EC000236
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant, No Exemption

Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc. (ORDINARY LOCATIONS)	UL 61010-2-201	E175199

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Conformity WAGO GmbH & Co. KG	-	-



Downloads

Environmental Product Compliance

Compliance Search

Environmental Product
Compliance 751-9402



Documentation

Manual

Product manual WAGO Device Manager	1552525323 2 en-US 2025-07-29 14:23 29.08.2025	pdf 2460.70 KB	
Product Manual Com- pact Controller 100	3712230539 4 en-US 2025-04-16 13:41 17.04.2025	pdf 5738.30 KB	

1 Compatible Products

1.1 Product Expansions

1.1.1 Runtime software



[Item No.: 2759-2283/211-1000](#)
Runtime; BACnet; 300; M; Single License;
Online activation



[Item No.: 2759-2273/211-1000](#)
Runtime; BACnet; 300; S; Single License;
Online activation



[Item No.: 2759-283/211-1000](#)
Runtime; BACnet; 300; Single License;
Online activation



[Item No.: 2759-2293/211-1000](#)
Runtime; DNP3 Master; M; Single License;
Online activation



[Item No.: 2759-2290/211-1000](#)
Runtime; DNP3 Slave; Single License; On-
line activation



[Item No.: 2759-293/211-1000](#)
Runtime; IEC60870 Master; M; Single Li-
cense; Online activation



[Item No.: 2759-290/211-1000](#)
Runtime; IEC60870 Slave; Single License;
Online activation



[Item No.: 2759-2243/211-1000](#)
Runtime; IEC61850 Client; M; Single Li-
cense; Online activation



[Item No.: 2759-2240/211-1000](#)
Runtime; IEC61850 Server; Single Licen-
se; Online activation



[Item No.: 2759-248/211-1000](#)
Runtime; Multi Cloud Connectivity; Single
License; Online activation



[Item No.: 2759-247/211-1000](#)
Runtime; Sparkplug; Single License; Onli-
ne activation

1.2 Optional Accessories

1.2.1 Female connector

1.2.1.1 Female connector/socket



[Item No.: 2091-1130](#)
1-conductor female connector; push-but-
ton; Push-in CAGE CLAMP®; 1.5 mm²; Pin
spacing 3.5 mm; 10-pole; 1,50 mm²; light
gray



[Item No.: 2091-1110/002-000](#)
1-conductor female connector; push-
button; Push-in CAGE CLAMP®; 1.5 mm²;
Pin spacing 3.5 mm; 10-pole; Gripping
plate sliding connector release; 1,50
mm²; light gray



[Item No.: 2091-1110](#)
1-conductor female connector; push-
button; Push-in CAGE CLAMP®; 1.5 mm²;
Pin spacing 3.5 mm; 10-pole; Gripping
plate; 1,50 mm²; light gray



[Item No.: 2091-1122](#)
1-conductor female connector; push-but-
ton; Push-in CAGE CLAMP®; 1.5 mm²; Pin
spacing 3.5 mm; 2-pole; 1,50 mm²; light
gray



[Item No.: 2091-1102/002-000](#)
1-conductor female connector; push-but-
ton; Push-in CAGE CLAMP®; 1.5 mm²; Pin
spacing 3.5 mm; 2-pole; Gripping plate sli-
ding connector release; 1,50 mm²; light
gray



[Item No.: 2091-1102](#)
1-conductor female connector; push-
button; Push-in CAGE CLAMP®; 1.5 mm²;
Pin spacing 3.5 mm; 2-pole; Gripping pla-
te; 1,50 mm²; light gray



[Item No.: 2091-1124](#)
1-conductor female connector; push-
button; Push-in CAGE CLAMP®; 1.5 mm²;
Pin spacing 3.5 mm; 4-pole; 1,50 mm²;
light gray



[Item No.: 2091-1104/002-000](#)
1-conductor female connector; push-but-
ton; Push-in CAGE CLAMP®; 1.5 mm²; Pin
spacing 3.5 mm; 4-pole; Gripping plate sli-
ding connector release; 1,50 mm²; light
gray

1.2.1.1 Female connector/socket



Item No.: 2091-1104
1-conductor female connector; push-button; Push-in CAGE CLAMP®; 1.5 mm²; Pin spacing 3.5 mm; 4-pole; Gripping plate; 1,50 mm²; light gray

1.2.2 Memory card

1.2.2.1 Memory card



Item No.: 758-879/000-3102
Memory Card SD Micro; 2 GByte



Item No.: 758-879/000-3108
Memory Card SD Micro; pSLC-NAND; 8 GB; Temperature range: -40 to 90°C

1.2.3 Tool

1.2.3.1 Operating tool



Item No.: 2092-1630
Unlocking tool; orange