
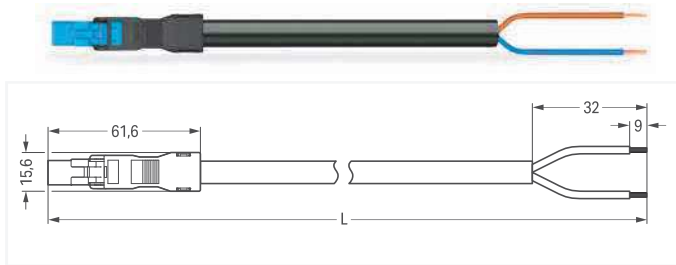
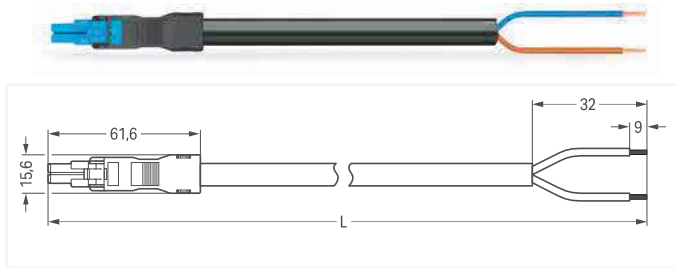


Cable assembly ▶ WINSTA® MINI ▶ 891 Series

Pole number: 2 ▶ Fire class per EN 50575: E_{ca} ▶ Coding: I ▶ 1.5 mm² ▶ Marking: + - ▶ PVC ▶
 Sheathed cable diameter: 6.8 ... 8.6 mm ▶ H05VV-F 2x1.5 ▶ DALI, Lighting Management

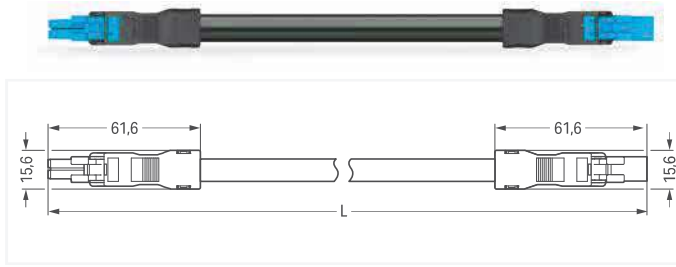

Interconnecting cable ▶ Socket - Plug ▶ Protection type: IP20; IP40 when mated				
Total length	Connector color / Strain relief color			PU
	blue / black	blue / white		
1 m	891-8982/006-101	891-8982/006-102		1
2 m	891-8982/006-201	891-8982/006-202		1
3 m	891-8982/006-301	891-8982/006-302		1
4 m	891-8982/006-401	891-8982/006-402		1
5 m	891-8982/006-501	891-8982/006-502		1
6 m	891-8982/006-601	891-8982/006-602		1
7 m	891-8982/006-701	891-8982/006-702		1
8 m	891-8982/006-801	891-8982/006-802		1

Connecting cable ▶ Socket - free end ▶ Protection type: IP40				
Total length	Connector color / Strain relief color			PU
	blue / black	blue / white		
1 m	891-8982/106-101	891-8982/106-102		1
2 m	891-8982/106-201	891-8982/106-202		1
3 m	891-8982/106-301	891-8982/106-302		1
4 m	891-8982/106-401	891-8982/106-402		1
5 m	891-8982/106-501	891-8982/106-502		1
6 m	891-8982/106-601	891-8982/106-602		1
7 m	891-8982/106-701	891-8982/106-702		1
8 m	891-8982/106-801	891-8982/106-802		1

Connecting cable ▶ Plug - free end ▶ Protection type: IP20; IP40 when mated				
Total length	Connector color / Strain relief color			PU
	blue / black	blue / white		
1 m	891-8982/206-101	891-8982/206-102		1
2 m	891-8982/206-201	891-8982/206-202		1
3 m	891-8982/206-301	891-8982/206-302		1
4 m	891-8982/206-401	891-8982/206-402		1
5 m	891-8982/206-501	891-8982/206-502		1
6 m	891-8982/206-601	891-8982/206-602		1
7 m	891-8982/206-701	891-8982/206-702		1
8 m	891-8982/206-801	891-8982/206-802		1

Accessories; for all products on this page

Locking lever; for flying leads; manually operated

Color	Item no.	PU (SPU)
● black	890-101	100 (50)
○ white	890-121	100 (50)



Locking lever; for flying leads; tool operated

Color	Item no.	PU (SPU)
● black	890-111	100 (50)
○ white	890-131	100 (50)




Mounting carrier; for flying leads; 2- to 5-pole

Color	Item no.	PU
● black	890-310	100
○ white	890-311	100

PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ► WINSTA® MINI ► 891 Series

Pole number: 2 ► Fire class per EN 50575: E_{ca} ► Coding: I ► 1.5 mm² ► Marking: + - ► Halogen-free
 ► Sheathed cable diameter: 6.8 ... 8.6 mm ► H05Z1Z1-F 2x1.5 ► DALI, Lighting Management

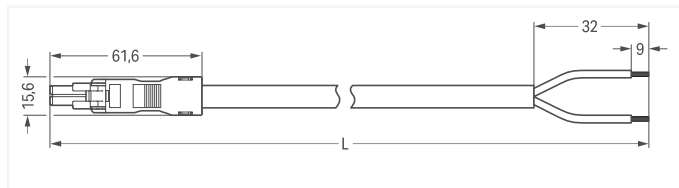

Interconnecting cable ► Socket - Plug ► Protection type: IP20; IP40 when mated

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	891-8982/016-101	891-8982/016-102	1
2 m	891-8982/016-201	891-8982/016-202	1
3 m	891-8982/016-301	891-8982/016-302	1
4 m	891-8982/016-401	891-8982/016-402	1
5 m	891-8982/016-501	891-8982/016-502	1
6 m	891-8982/016-601	891-8982/016-602	1
7 m	891-8982/016-701	891-8982/016-702	1
8 m	891-8982/016-801	891-8982/016-802	1

Connecting cable ► Socket - free end ► Protection type: IP40

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	891-8982/116-101	891-8982/116-102	1
2 m	891-8982/116-201	891-8982/116-202	1
3 m	891-8982/116-301	891-8982/116-302	1
4 m	891-8982/116-401	891-8982/116-402	1
5 m	891-8982/116-501	891-8982/116-502	1
6 m	891-8982/116-601	891-8982/116-602	1
7 m	891-8982/116-701	891-8982/116-702	1
8 m	891-8982/116-801	891-8982/116-802	1

Connecting cable ► Plug - free end ► Protection type: IP20; IP40 when mated

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	891-8982/216-101	891-8982/216-102	1
2 m	891-8982/216-201	891-8982/216-202	1
3 m	891-8982/216-301	891-8982/216-302	1
4 m	891-8982/216-401	891-8982/216-402	1
5 m	891-8982/216-501	891-8982/216-502	1
6 m	891-8982/216-601	891-8982/216-602	1
7 m	891-8982/216-701	891-8982/216-702	1
8 m	891-8982/216-801	891-8982/216-802	1

Accessories; for all products on this page

Locking lever; for flying leads; manually operated



Locking lever; for flying leads; tool operated



Mounting carrier; for flying leads; 2- to 5-pole

Color	Item no.	PU (SPU)
● black	890-101	100 (50)
○ white	890-121	100 (50)


Color	Item no.	PU (SPU)
● black	890-111	100 (50)
○ white	890-131	100 (50)

Color	Item no.	PU
● black	890-310	100
○ white	890-311	100

PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ▶ WINSTA® MINI ▶ 891 Series

Pole number: 5 ▶ Fire class per EN 50575: E_{ca} ▶ Coding: I ▶ 1.5 mm² ▶ Marking: N ⊕ L - + ▶ PVC ▶
 Sheathed cable diameter: 9.3 ... 11.6 mm ▶ H05VV-F 5G1.5 ▶ DALI, Lighting Management

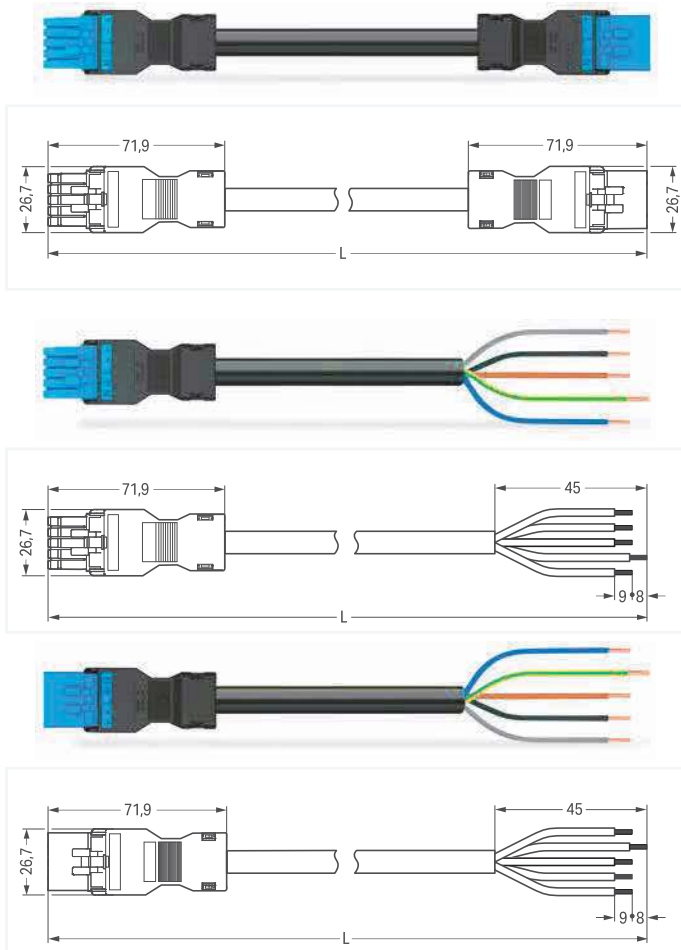

Interconnecting cable ▶ Socket - Plug ▶ Protection type: IP20; IP40 when mated

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	891-8985/006-101	891-8985/006-102	1
2 m	891-8985/006-201	891-8985/006-202	1
3 m	891-8985/006-301	891-8985/006-302	1
4 m	891-8985/006-401	891-8985/006-402	1
5 m	891-8985/006-501	891-8985/006-502	1
6 m	891-8985/006-601	891-8985/006-602	1
7 m	891-8985/006-701	891-8985/006-702	1
8 m	891-8985/006-801	891-8985/006-802	1

Connecting cable ▶ Socket - free end ▶ Protection type: IP40

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	891-8985/106-101	891-8985/106-102	1
2 m	891-8985/106-201	891-8985/106-202	1
3 m	891-8985/106-301	891-8985/106-302	1
4 m	891-8985/106-401	891-8985/106-402	1
5 m	891-8985/106-501	891-8985/106-502	1
6 m	891-8985/106-601	891-8985/106-602	1
7 m	891-8985/106-701	891-8985/106-702	1
8 m	891-8985/106-801	891-8985/106-802	1

Connecting cable ▶ Plug - free end ▶ Protection type: IP20; IP40 when mated

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	891-8985/206-101	891-8985/206-102	1
2 m	891-8985/206-201	891-8985/206-202	1
3 m	891-8985/206-301	891-8985/206-302	1
4 m	891-8985/206-401	891-8985/206-402	1
5 m	891-8985/206-501	891-8985/206-502	1
6 m	891-8985/206-601	891-8985/206-602	1
7 m	891-8985/206-701	891-8985/206-702	1
8 m	891-8985/206-801	891-8985/206-802	1

Accessories; for all products on this page

Locking lever; for flying leads; manually operated

Color	Item no.	PU (SPU)
● black	890-101	100 (50)
○ white	890-121	100 (50)



Locking lever; for flying leads; tool operated

Color	Item no.	PU (SPU)
● black	890-111	100 (50)
○ white	890-131	100 (50)



Mounting carrier; for flying leads; 2- to 5-pole


Color	Item no.	PU
● black	890-310	100
○ white	890-311	100

PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ► WINSTA® MINI ► 891 Series

Pole number: 5 ► Fire class per EN 50575: E_{ca} ► Coding: I ► 1.5 mm² ► Marking: N ⊕ L - + ► Halo-gen-free ► Sheathed cable diameter: 9.3 ... 11.6 mm ► H05Z1Z1-F 5G1.5 ► DALI, Lighting Man-agement

1

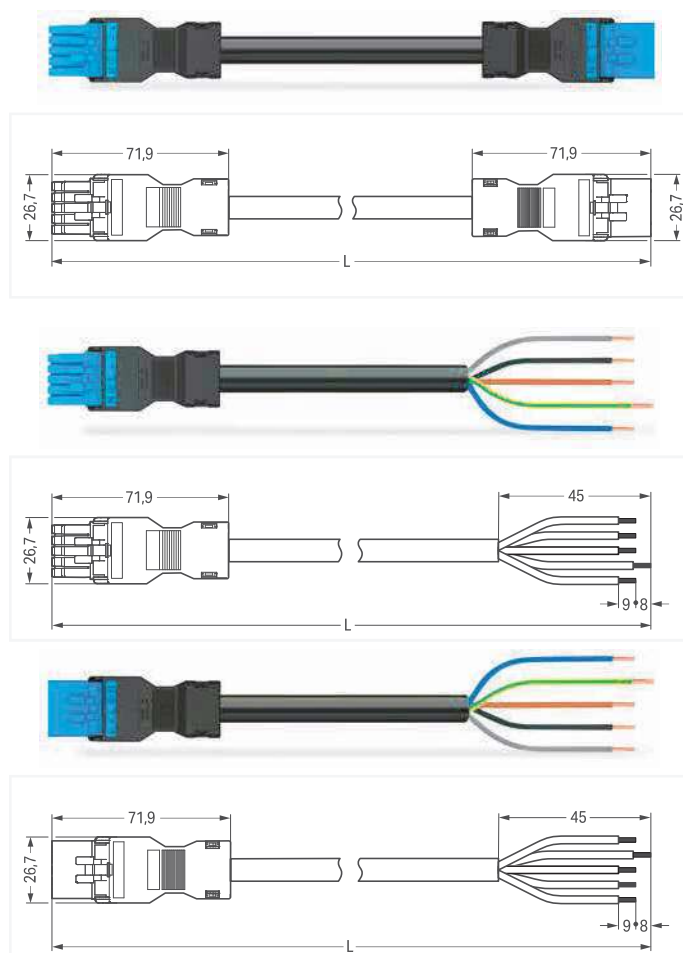

Interconnecting cable ► Socket - Plug ► Protection type: IP20; IP40 when mated

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	891-8985/016-101	891-8985/016-102	1
2 m	891-8985/016-201	891-8985/016-202	1
3 m	891-8985/016-301	891-8985/016-302	1
4 m	891-8985/016-401	891-8985/016-402	1
5 m	891-8985/016-501	891-8985/016-502	1
6 m	891-8985/016-601	891-8985/016-602	1
7 m	891-8985/016-701	891-8985/016-702	1
8 m	891-8985/016-801	891-8985/016-802	1

Connecting cable ► Socket - free end ► Protection type: IP40

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	891-8985/116-101	891-8985/116-102	1
2 m	891-8985/116-201	891-8985/116-202	1
3 m	891-8985/116-301	891-8985/116-302	1
4 m	891-8985/116-401	891-8985/116-402	1
5 m	891-8985/116-501	891-8985/116-502	1
6 m	891-8985/116-601	891-8985/116-602	1
7 m	891-8985/116-701	891-8985/116-702	1
8 m	891-8985/116-801	891-8985/116-802	1

Connecting cable ► Plug - free end ► Protection type: IP20; IP40 when mated

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	891-8985/216-101	891-8985/216-102	1
2 m	891-8985/216-201	891-8985/216-202	1
3 m	891-8985/216-301	891-8985/216-302	1
4 m	891-8985/216-401	891-8985/216-402	1
5 m	891-8985/216-501	891-8985/216-502	1
6 m	891-8985/216-601	891-8985/216-602	1
7 m	891-8985/216-701	891-8985/216-702	1
8 m	891-8985/216-801	891-8985/216-802	1

Accessories; for all products on this page



Locking lever; for flying leads; manually operated

Color	Item no.	PU (SPU)
● black	890-101	100 (50)
○ white	890-121	100 (50)



Locking lever; for flying leads; tool operated

Color	Item no.	PU (SPU)
● black	890-111	100 (50)
○ white	890-131	100 (50)






Mounting carrier; for flying leads; 2- to 5-pole

Color	Item no.	PU
● black	890-310	100
○ white	890-311	100

PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ► WINSTA® MIDI ► 771 Series

Pole number: 2 ► Protection type: IP20 ► Fire class per EN 50575: E_{ca} ► Coding: I ► 1.5 mm² ► Marking: DA+ DA- ► PVC ► Sheathed cable diameter: 6.8 ... 8.6 mm ► H05VV-F 2x1.5 ► DALI, Lighting Management

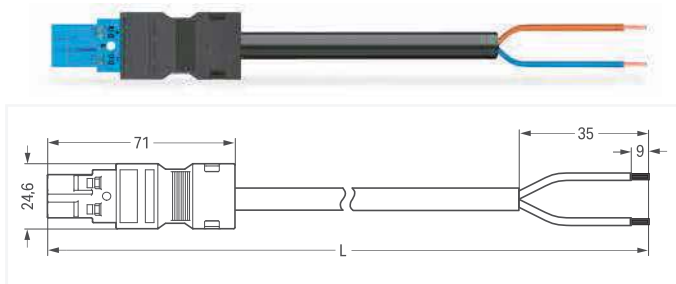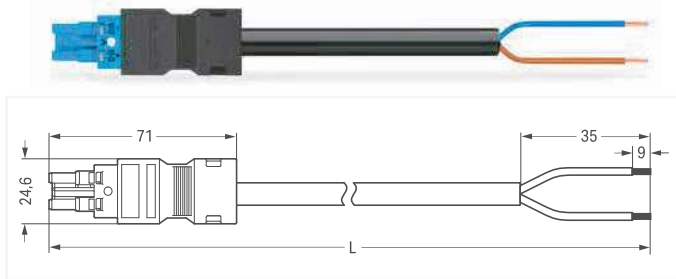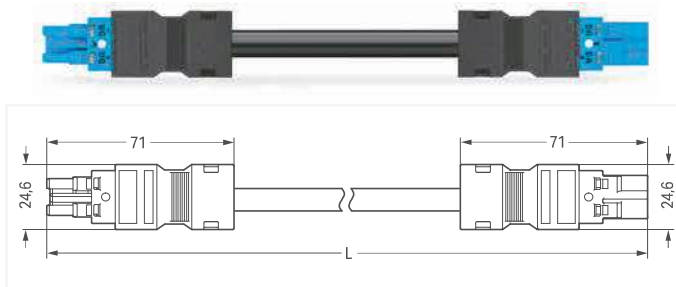

Interconnecting cable ► Socket - Plug

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-8982/006-101	771-8982/006-102	1
2 m	771-8982/006-201	771-8982/006-202	1
3 m	771-8982/006-301	771-8982/006-302	1
4 m	771-8982/006-401	771-8982/006-402	1
5 m	771-8982/006-501	771-8982/006-502	1
6 m	771-8982/006-601	771-8982/006-602	1
7 m	771-8982/006-701	771-8982/006-702	1
8 m	771-8982/006-801	771-8982/006-802	1

Connecting cable ► Socket - free end ► Strip length (outer insulation): 35 mm

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-8982/106-101	771-8982/106-102	1
2 m	771-8982/106-201	771-8982/106-202	1
3 m	771-8982/106-301	771-8982/106-302	1
4 m	771-8982/106-401	771-8982/106-402	1
5 m	771-8982/106-501	771-8982/106-502	1
6 m	771-8982/106-601	771-8982/106-602	1
7 m	771-8982/106-701	771-8982/106-702	1
8 m	771-8982/106-801	771-8982/106-802	1

Connecting cable ► Plug - free end ► Strip length (outer insulation): 35 mm

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-8982/206-101	771-8982/206-102	1
2 m	771-8982/206-201	771-8982/206-202	1
3 m	771-8982/206-301	771-8982/206-302	1
4 m	771-8982/206-401	771-8982/206-402	1
5 m	771-8982/206-501	771-8982/206-502	1
6 m	771-8982/206-601	771-8982/206-602	1
7 m	771-8982/206-701	771-8982/206-702	1
8 m	771-8982/206-801	771-8982/206-802	1

Accessories; for all products on this page



Locking lever; for flying leads; manually operated

Color	Item no.	PU (SPU)
● black	770-101	100 (25)
○ white	770-121	100 (25)



Locking lever; for flying leads; tool operated

Color	Item no.	PU (SPU)
● black	770-111	100 (25)
○ white	770-131	100 (25)






Mounting carrier; for flying leads; 2- to 5-pole

Color	Item no.	PU
● black	770-310	25

PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ► WINSTA® MIDI ► 771 Series

Pole number: 2 ► Protection type: IP20 ► Fire class per EN 50575: E_{ca} ► Coding: I ► 1.5 mm² ►
 Marking: DA+ DA- ► Halogen-free ► Sheathed cable diameter: 6.8 ... 8.6 mm ► H05Z1Z1-F 2x1.5 ►
 DALI, Lighting Management

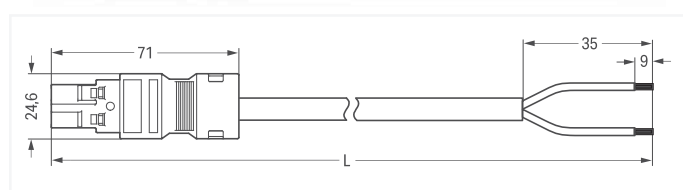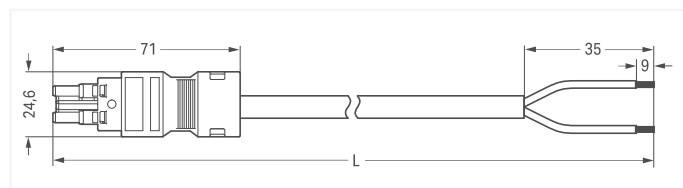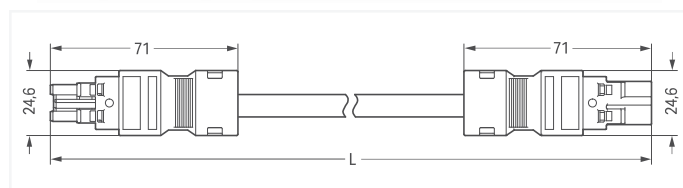**Interconnecting cable ► Socket - Plug**

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-8982/016-101	771-8982/016-102	1
2 m	771-8982/016-201	771-8982/016-202	1
3 m	771-8982/016-301	771-8982/016-302	1
4 m	771-8982/016-401	771-8982/016-402	1
5 m	771-8982/016-501	771-8982/016-502	1
6 m	771-8982/016-601	771-8982/016-602	1
7 m	771-8982/016-701	771-8982/016-702	1
8 m	771-8982/016-801	771-8982/016-802	1

Connecting cable ► Socket - free end ► Strip length (outer insulation): 35 mm

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-8982/116-101	771-8982/116-102	1
2 m	771-8982/116-201	771-8982/116-202	1
3 m	771-8982/116-301	771-8982/116-302	1
4 m	771-8982/116-401	771-8982/116-402	1
5 m	771-8982/116-501	771-8982/116-502	1
6 m	771-8982/116-601	771-8982/116-602	1
7 m	771-8982/116-701	771-8982/116-702	1
8 m	771-8982/116-801	771-8982/116-802	1

Connecting cable ► Plug - free end ► Strip length (outer insulation): 35 mm

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-8982/216-101	771-8982/216-102	1
2 m	771-8982/216-201	771-8982/216-202	1
3 m	771-8982/216-301	771-8982/216-302	1
4 m	771-8982/216-401	771-8982/216-402	1
5 m	771-8982/216-501	771-8982/216-502	1
6 m	771-8982/216-601	771-8982/216-602	1
7 m	771-8982/216-701	771-8982/216-702	1
8 m	771-8982/216-801	771-8982/216-802	1

Accessories; for all products on this page

Locking lever; for flying leads; manually operated



Locking lever; for flying leads; tool operated



Mounting carrier; for flying leads; 2- to 5-pole

Color	Item no.	PU (SPU)
● black	770-101	100 (25)
○ white	770-121	100 (25)


Color	Item no.	PU (SPU)
● black	770-111	100 (25)
○ white	770-131	100 (25)

Color	Item no.	PU
● black	770-310	25

PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ▶ WINSTA® MIDI ▶ 771 Series

Pole number: 5 ▶ Protection type: IP20 ▶ Fire class per EN 50575: E_{ca} ▶ Coding: I ▶ 1.5 mm² ▶ Marking: N ⊕ L DA- DA+ ▶ PVC ▶ Sheathed cable diameter: 9.3 ... 11.6 mm ▶ H05VV-F 5G1.5 ▶ DALI, Lighting Management

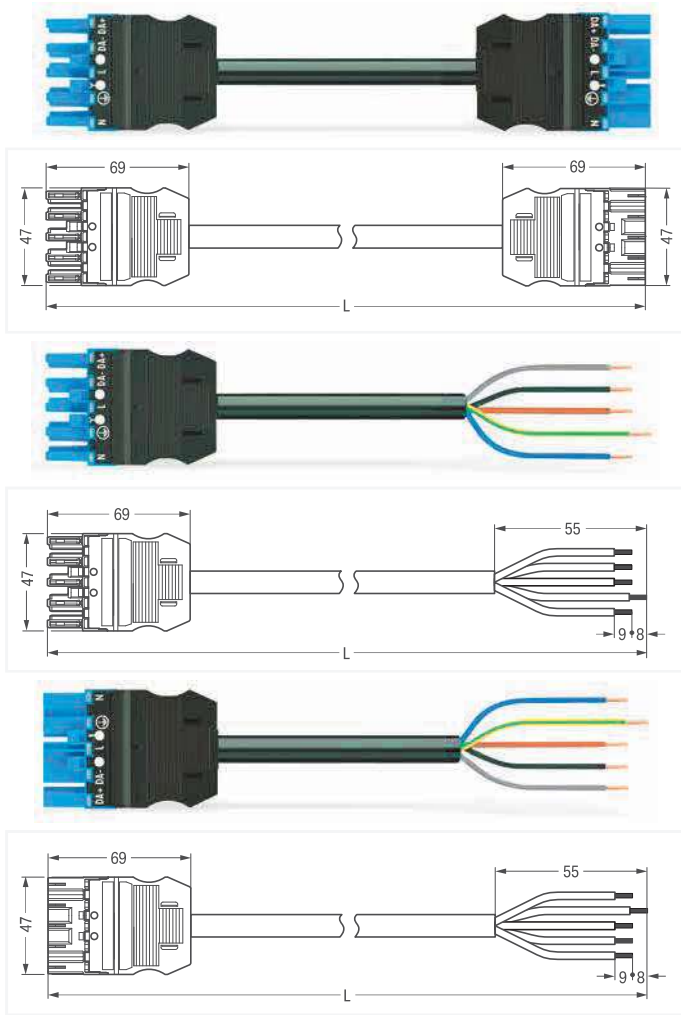**Interconnecting cable ▶ Socket - Plug**

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-9985/006-101	771-9985/006-102	1
2 m	771-9985/006-201	771-9985/006-202	1
3 m	771-9985/006-301	771-9985/006-302	1
4 m	771-9985/006-401	771-9985/006-402	1
5 m	771-9985/006-501	771-9985/006-502	1
6 m	771-9985/006-601	771-9985/006-602	1
7 m	771-9985/006-701	771-9985/006-702	1
8 m	771-9985/006-801	771-9985/006-802	1

Connecting cable ▶ Socket - free end ▶ Strip length (outer insulation): 55 mm

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-9985/106-101	771-9985/106-102	1
2 m	771-9985/106-201	771-9985/106-202	1
3 m	771-9985/106-301	771-9985/106-302	1
4 m	771-9985/106-401	771-9985/106-402	1
5 m	771-9985/106-501	771-9985/106-502	1
6 m	771-9985/106-601	771-9985/106-602	1
7 m	771-9985/106-701	771-9985/106-702	1
8 m	771-9985/106-801	771-9985/106-802	1

Connecting cable ▶ Plug - free end ▶ Strip length (outer insulation): 55 mm

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-9985/206-101	771-9985/206-102	1
2 m	771-9985/206-201	771-9985/206-202	1
3 m	771-9985/206-301	771-9985/206-302	1
4 m	771-9985/206-401	771-9985/206-402	1
5 m	771-9985/206-501	771-9985/206-502	1
6 m	771-9985/206-601	771-9985/206-602	1
7 m	771-9985/206-701	771-9985/206-702	1
8 m	771-9985/206-801	771-9985/206-802	1

Accessories; for all products on this page

Locking lever; for flying leads; manually operated

Color	Item no.	PU (SPU)
● black	770-101	100 (25)
○ white	770-121	100 (25)



Locking lever; for flying leads; tool operated

Color	Item no.	PU (SPU)
● black	770-111	100 (25)
○ white	770-131	100 (25)




Mounting carrier; for flying leads; 2- to 5-pole

Color	Item no.	PU
● black	770-310	25

PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ► WINSTA® MIDI ► 771 Series

Pole number: 5 ► Protection type: IP20 ► Fire class per EN 50575: E_{ca} ► Coding: I ► 1.5 mm² ►
 Marking: N ⊕ L DA- DA+ ► Halogen-free ► Sheathed cable diameter: 9.3 ... 11.6 mm ► H05Z1Z1-F
 5G1.5 ► DALI, Lighting Management

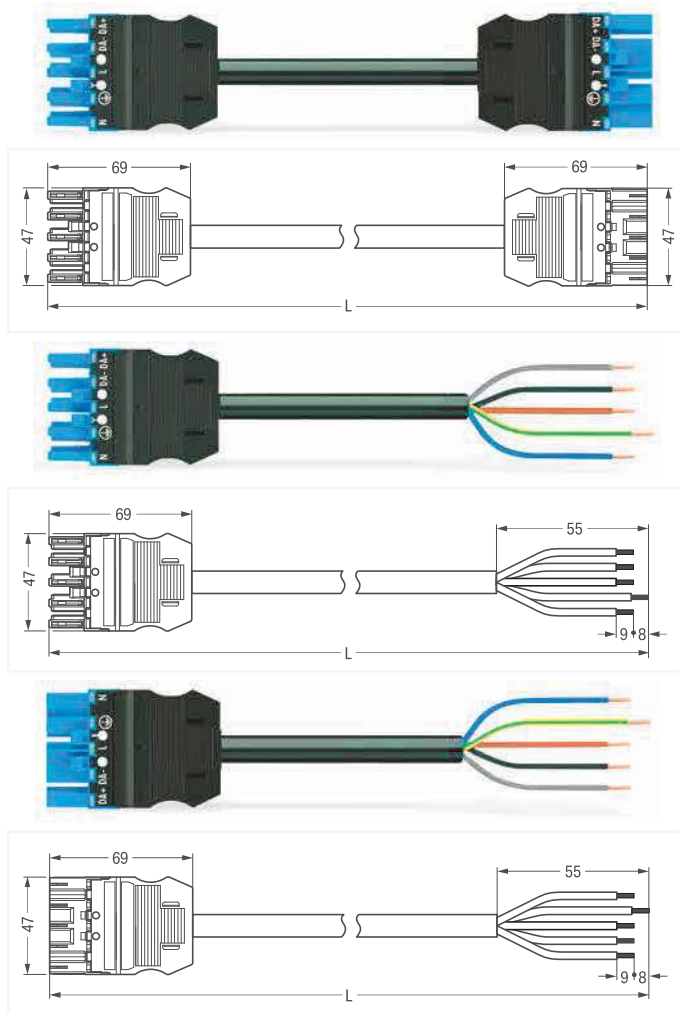**Interconnecting cable ► Socket - Plug**

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-9985/016-101	771-9985/016-102	1
2 m	771-9985/016-201	771-9985/016-202	1
3 m	771-9985/016-301	771-9985/016-302	1
4 m	771-9985/016-401	771-9985/016-402	1
5 m	771-9985/016-501	771-9985/016-502	1
6 m	771-9985/016-601	771-9985/016-602	1
7 m	771-9985/016-701	771-9985/016-702	1
8 m	771-9985/016-801	771-9985/016-802	1

Connecting cable ► Socket - free end ► Strip length (outer insulation): 55 mm

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-9985/116-101	771-9985/116-102	1
2 m	771-9985/116-201	771-9985/116-202	1
3 m	771-9985/116-301	771-9985/116-302	1
4 m	771-9985/116-401	771-9985/116-402	1
5 m	771-9985/116-501	771-9985/116-502	1
6 m	771-9985/116-601	771-9985/116-602	1
7 m	771-9985/116-701	771-9985/116-702	1
8 m	771-9985/116-801	771-9985/116-802	1

Connecting cable ► Plug - free end ► Strip length (outer insulation): 55 mm

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-9985/216-101	771-9985/216-102	1
2 m	771-9985/216-201	771-9985/216-202	1
3 m	771-9985/216-301	771-9985/216-302	1
4 m	771-9985/216-401	771-9985/216-402	1
5 m	771-9985/216-501	771-9985/216-502	1
6 m	771-9985/216-601	771-9985/216-602	1
7 m	771-9985/216-701	771-9985/216-702	1
8 m	771-9985/216-801	771-9985/216-802	1

Accessories; for all products on this page



Locking lever; for flying leads; manually operated

Color	Item no.	PU (SPU)
● black	770-101	100 (25)
○ white	770-121	100 (25)



Locking lever; for flying leads; tool operated

Color	Item no.	PU (SPU)
● black	770-111	100 (25)
○ white	770-131	100 (25)




Mounting carrier; for flying leads; 2- to 5-pole

Color	Item no.	PU
● black	770-310	25

PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ▶ WINSTA® MIDI ▶ 771 Series
Pole number: 5 ▶ Protection type: IP20 ▶ Fire class per EN 50575: E_{ca} ▶ Coding: I ▶ 2.5 mm² ▶ Marking: N ⊕ L DA- DA+ ▶ PVC ▶ Sheathed cable diameter: 11.2 ... 13.9 mm ▶ H05VV-F 5G2.5 ▶ DALI, Lighting Management

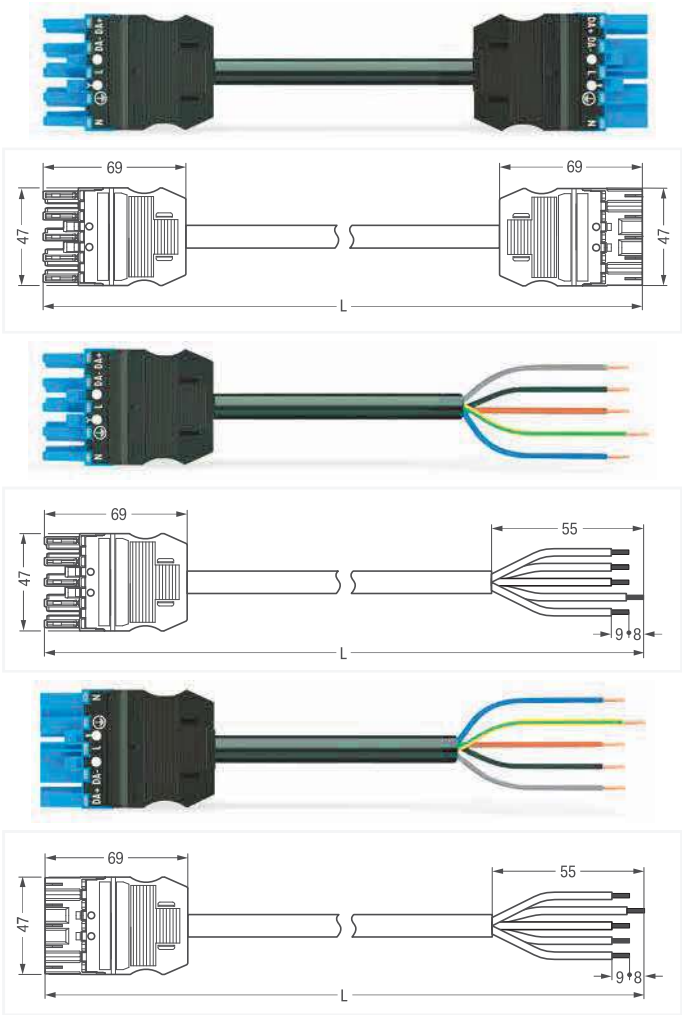

Interconnecting cable ▶ Socket - Plug				
Total length	Connector color / Strain relief color			PU
	blue / black	blue / white		
1 m	771-9985/007-101	771-9985/007-102		1
2 m	771-9985/007-201	771-9985/007-202		1
3 m	771-9985/007-301	771-9985/007-302		1
4 m	771-9985/007-401	771-9985/007-402		1
5 m	771-9985/007-501	771-9985/007-502		1
6 m	771-9985/007-601	771-9985/007-602		1
7 m	771-9985/007-701	771-9985/007-702		1
8 m	771-9985/007-801	771-9985/007-802		1

Connecting cable ▶ Socket - free end ▶ Strip length (outer insulation): 55 mm				
Total length	Connector color / Strain relief color			PU
	blue / black	blue / white		
1 m	771-9985/107-101	771-9985/107-102		1
2 m	771-9985/107-201	771-9985/107-202		1
3 m	771-9985/107-301	771-9985/107-302		1
4 m	771-9985/107-401	771-9985/107-402		1
5 m	771-9985/107-501	771-9985/107-502		1
6 m	771-9985/107-601	771-9985/107-602		1
7 m	771-9985/107-701	771-9985/107-702		1
8 m	771-9985/107-801	771-9985/107-802		1

Connecting cable ▶ Plug - free end ▶ Strip length (outer insulation): 55 mm				
Total length	Connector color / Strain relief color			PU
	blue / black	blue / white		
1 m	771-9985/207-101	771-9985/207-102		1
2 m	771-9985/207-201	771-9985/207-202		1
3 m	771-9985/207-301	771-9985/207-302		1
4 m	771-9985/207-401	771-9985/207-402		1
5 m	771-9985/207-501	771-9985/207-502		1
6 m	771-9985/207-601	771-9985/207-602		1
7 m	771-9985/207-701	771-9985/207-702		1
8 m	771-9985/207-801	771-9985/207-802		1

Accessories; for all products on this page

Locking lever; for flying leads; manually operated

Locking lever; for flying leads; tool operated


Mounting carrier; for flying leads; 2- to 5-pole

Color	Item no.	PU (SPU)	Color	Item no.	PU (SPU)	Color	Item no.	PU
● black	770-101	100 (25)	● black	770-111	100 (25)	● black	770-310	25
○ white	770-121	100 (25)	○ white	770-131	100 (25)			

PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ► WINSTA® MIDI ► 771 SeriesPole number: 5 ► Protection type: IP20 ► Fire class per EN 50575: E_{ca} ► Coding: I ► 2.5 mm²

► Marking: N ⊕ L DA- DA+ ► Halogen-free ► Sheathed cable diameter: 11.2 ... 13.9 mm ► H05Z1Z1-F 5G2.5 ► DALI, Lighting Management

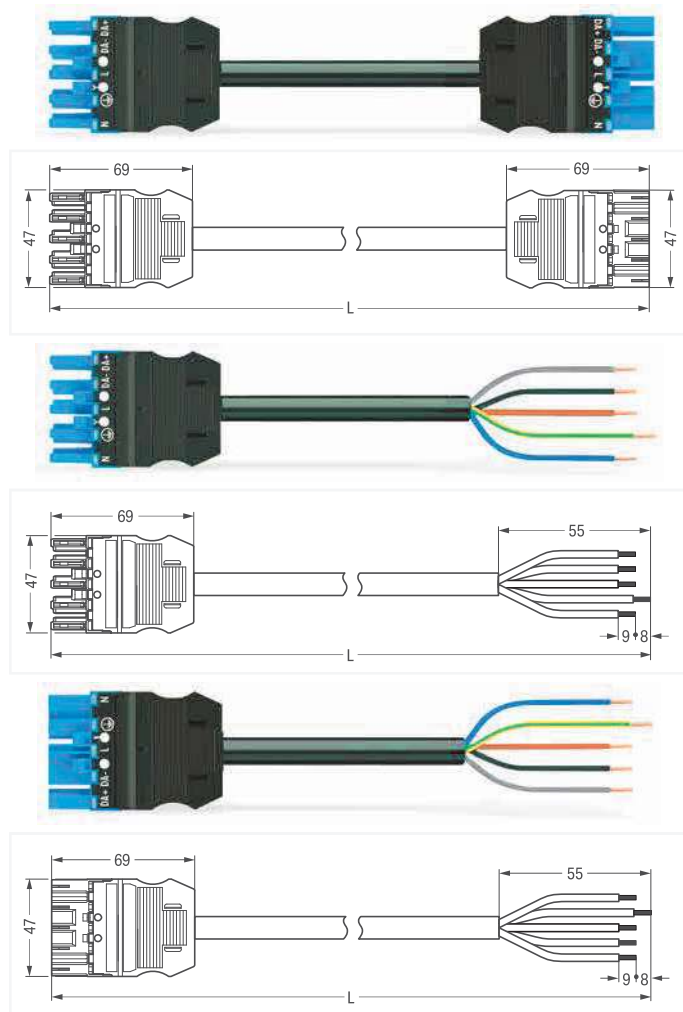**Interconnecting cable ► Socket - Plug**

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-9985/017-101	771-9985/017-102	1
2 m	771-9985/017-201	771-9985/017-202	1
3 m	771-9985/017-301	771-9985/017-302	1
4 m	771-9985/017-401	771-9985/017-402	1
5 m	771-9985/017-501	771-9985/017-502	1
6 m	771-9985/017-601	771-9985/017-602	1
7 m	771-9985/017-701	771-9985/017-702	1
8 m	771-9985/017-801	771-9985/017-802	1

Connecting cable ► Socket - free end ► Strip length (outer insulation): 55 mm

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-9985/117-101	771-9985/117-102	1
2 m	771-9985/117-201	771-9985/117-202	1
3 m	771-9985/117-301	771-9985/117-302	1
4 m	771-9985/117-401	771-9985/117-402	1
5 m	771-9985/117-501	771-9985/117-502	1
6 m	771-9985/117-601	771-9985/117-602	1
7 m	771-9985/117-701	771-9985/117-702	1
8 m	771-9985/117-801	771-9985/117-802	1

Connecting cable ► Plug - free end ► Strip length (outer insulation): 55 mm

Total length	Connector color / Strain relief color		PU
	blue / black	blue / white	
1 m	771-9985/217-101	771-9985/217-102	1
2 m	771-9985/217-201	771-9985/217-202	1
3 m	771-9985/217-301	771-9985/217-302	1
4 m	771-9985/217-401	771-9985/217-402	1
5 m	771-9985/217-501	771-9985/217-502	1
6 m	771-9985/217-601	771-9985/217-602	1
7 m	771-9985/217-701	771-9985/217-702	1
8 m	771-9985/217-801	771-9985/217-802	1

Accessories; for all products on this page



Locking lever; for flying leads; manually operated

Color	Item no.	PU (SPU)
● black	770-101	100 (25)
○ white	770-121	100 (25)



Locking lever; for flying leads; tool operated

Color	Item no.	PU (SPU)
● black	770-111	100 (25)
○ white	770-131	100 (25)




Mounting carrier; for flying leads; 2- to 5-pole

Color	Item no.	PU
● black	770-310	25

PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ▶ WINSTA® MIDI ▶ 771 Series
Pole number: 5 ▶ Protection type: IP20 ▶ Fire class per EN 50575: E_{ca} ▶ Coding: I ▶ 1.5 mm² ▶
Connecting cable ▶ PVC ▶ Plug - free end ▶ Strip length (outer insulation): 48 mm ▶ DALI, Lighting
Management

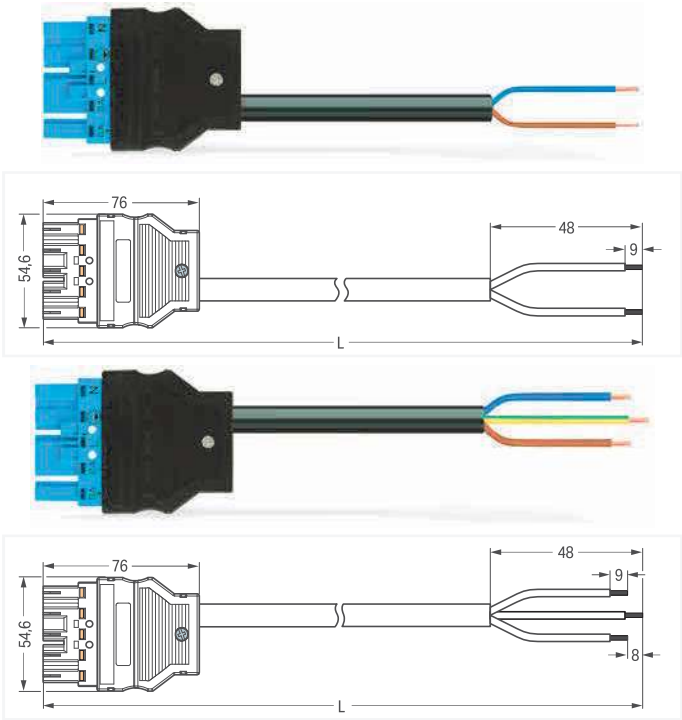

Sheathed cable diameter: 6,8 ... 8,6 mm ▶ H05VV-F 2x1,5			
Total length	Connector color / Strain relief color		
	blue / black		PU
1 m	771-5001/164-000		1
2 m	771-5001/165-000		1
3 m	771-5001/166-000		1
4 m	771-5001/167-000		1
5 m	771-5001/168-000		1
6 m	771-5001/169-000		1
7 m	771-5001/170-000		1
8 m	771-5001/171-000		1

Sheathed cable diameter: 7,4 ... 9,4 mm ▶ H05VV-F 3G1,5			
Total length	Connector color / Strain relief color		
	blue / black		PU
1 m	771-5001/148-000		1
2 m	771-5001/149-000		1
3 m	771-5001/150-000		1
4 m	771-5001/151-000		1
5 m	771-5001/152-000		1
6 m	771-5001/153-000		1
7 m	771-5001/154-000		1
8 m	771-5001/155-000		1

Accessories; for all products on this page



Locking lever; for flying leads; manually operated



Locking lever; for flying leads; tool operated




Mounting carrier; for flying leads; 2- to 5-pole

Color	Item no.	PU (SPU)	Color	Item no.	PU (SPU)	Color	Item no.	PU
● black	770-101	100 (25)	● black	770-111	100 (25)	● black	770-310	25
○ white	770-121	100 (25)	○ white	770-131	100 (25)			

PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ► WINSTA® MIDI ► 771 SeriesPole number: 5 ► Protection type: IP20 ► Fire class per EN 50575: E_{ca} ► Coding: I ► 1.5 mm² ►

Connecting cable ► Halogen-free ► Plug - free end ► Strip length (outer insulation): 48 mm ► DALI, Lighting Management

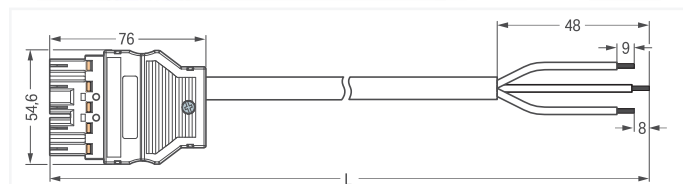

Sheathed cable diameter: 6,8 ... 8,6 mm ► H05Z1Z1-F 2x1,5

Total length	Connector color / Strain relief color			PU
	blue / black			
1 m	771-5001/172-000			1
2 m	771-5001/173-000			1
3 m	771-5001/174-000			1
4 m	771-5001/175-000			1
5 m	771-5001/176-000			1
6 m	771-5001/177-000			1
7 m	771-5001/178-000			1
8 m	771-5001/179-000			1

Sheathed cable diameter: 7,4 ... 9,4 mm ► H05Z1Z1-F 3G1,5

Total length	Connector color / Strain relief color			PU
	blue / black			
1 m	771-5001/156-000			1
2 m	771-5001/157-000			1
3 m	771-5001/158-000			1
4 m	771-5001/159-000			1
5 m	771-5001/160-000			1
6 m	771-5001/161-000			1
7 m	771-5001/162-000			1
8 m	771-5001/163-000			1

Accessories; for all products on this page

Locking lever; for flying leads; manually operated



Locking lever; for flying leads; tool operated



Mounting carrier; for flying leads; 2- to 5-pole

Color	Item no.	PU (SPU)
● black	770-101	100 (25)
○ white	770-121	100 (25)


Color	Item no.	PU (SPU)
● black	770-111	100 (25)
○ white	770-131	100 (25)

Color	Item no.	PU
● black	770-310	25



PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ▶ WINSTA® MIDI ▶ 771 Series


Pole number: 5 ▶ Protection type: IP20 ▶ Fire class per EN 50575: E_{ca} ▶ Coding: I ▶ 1.5 mm² ▶ Y-cable ▶ PVC ▶ Sheathed cable diameter: 6.8 ... 8.6 mm ▶ H05VV-F 2x1.5 ▶ DALI, Lighting Management

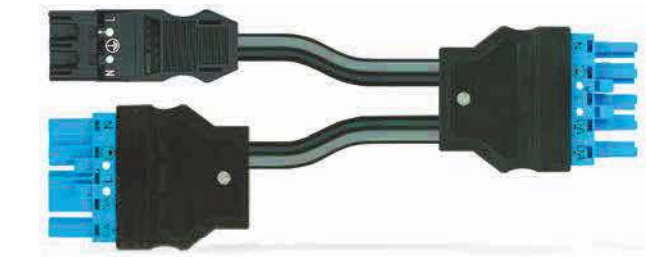

MIDI plug; MIDI plug - MIDI socket			
Total length	Connector color / Strain relief color		
	blue / black		PU
0.5 m	771-5001/180-000		1

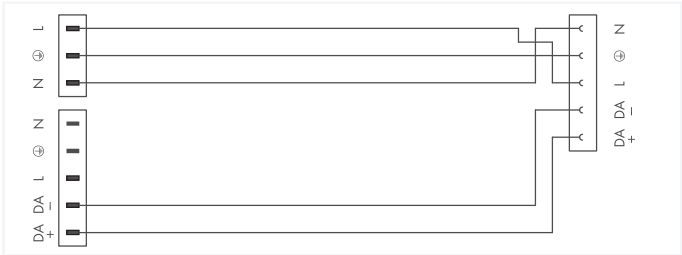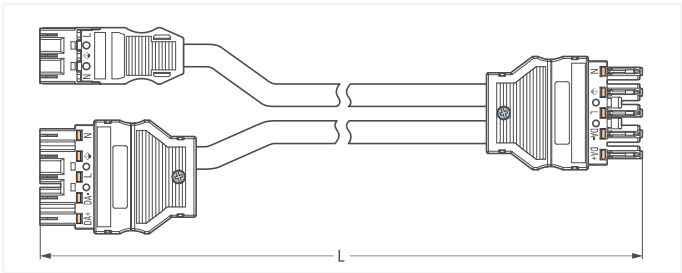


MIDI plug; MINI plug - MIDI socket			
Total length	Connector color / Strain relief color		
	blue / black		PU
0.5 m	771-5001/182-000		1

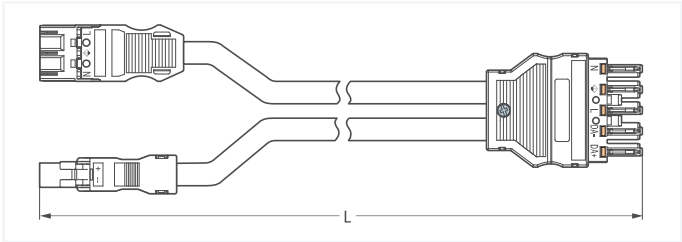




PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

Cable assembly ▶ WINSTA® MIDI ▶ 771 Series



Pole number: 5 ▶ Protection type: IP20 ▶ Fire class per EN 50575: E_{ca} ▶ Coding: I ▶ 1.5 mm² ▶ Y-cable ▶ Halogen-free ▶ Sheathed cable diameter: 6.8 ... 8.6 mm ▶ H05Z1Z1-F 2x1.5 ▶ DALI, Lighting Management

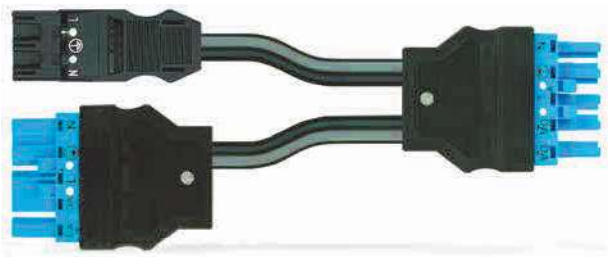

MIDI plug; MIDI plug - MIDI socket			
Total length	Connector color / Strain relief color		
	blue / black		PU
0.5 m	771-5001/181-000		1

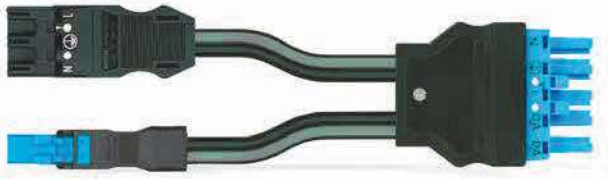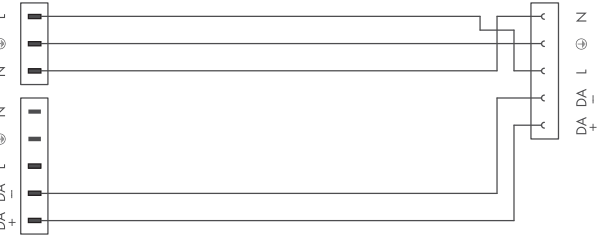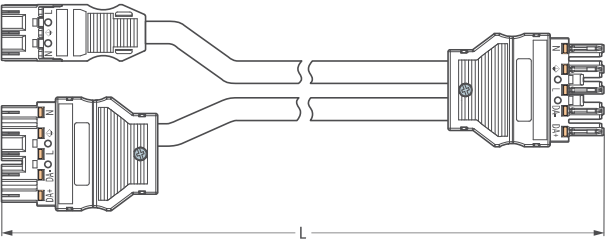

MIDI plug; MINI plug - MIDI socket			
Total length	Connector color / Strain relief color		
	blue / black		PU
0.5 m	771-5001/183-000		1

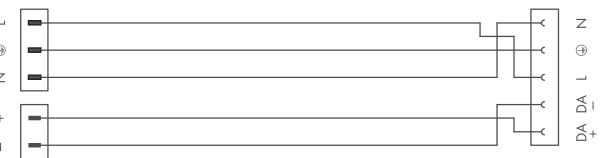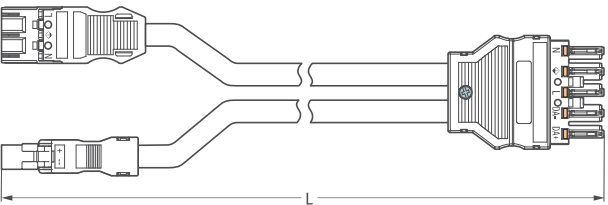

PU = packaging unit; SPU = subpackaging unit; Dimensions in mm

WINSTA® Boxes ▶ 899 Series

Supply Cable Entry

8 Outputs; B-Coding; WINSTA® MINI


Description

Power supply is performed via 10-pole cable on a terminal strip.
Application example:
Valves control

Includes: One cable clamp and two mounting screws

Technical Data

Rated voltage (III / 3)	250 V
Rated impulse voltage (III / 3)	4 kV
Rated current	6 A
Internal wiring	0.75 mm²

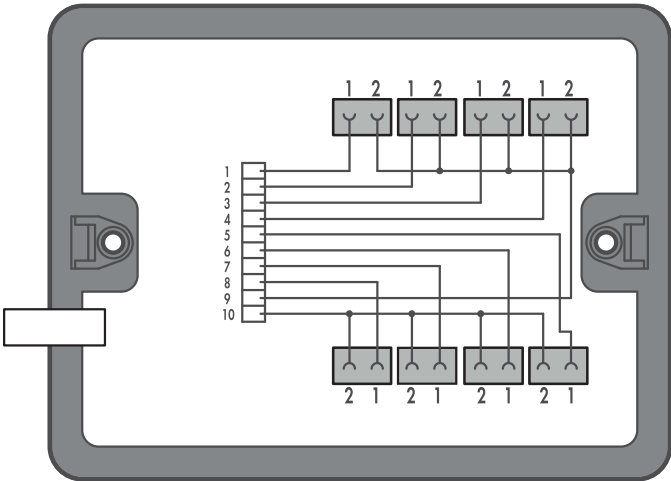

Distribution box; supply cable entry		
Color	Item No.	Pack. Unit
● black	899-631/454-000	1

230 V + DALI


2 Inputs; 6 Outputs; A-, I-Coding; WINSTA® MINI; WINSTA® MIDI

Description

This WINSTA® Box connects 5-pole DALI lights.
Power supply is performed via two cables (230 V and DALI). Both cables are combined into four outputs.

Technical Data

Rated voltage (III / 3)	250 V
Rated impulse voltage (III / 3)	4 kV
Rated current	25 A / 16 A
Internal wiring	4 mm² / 1.5 mm²

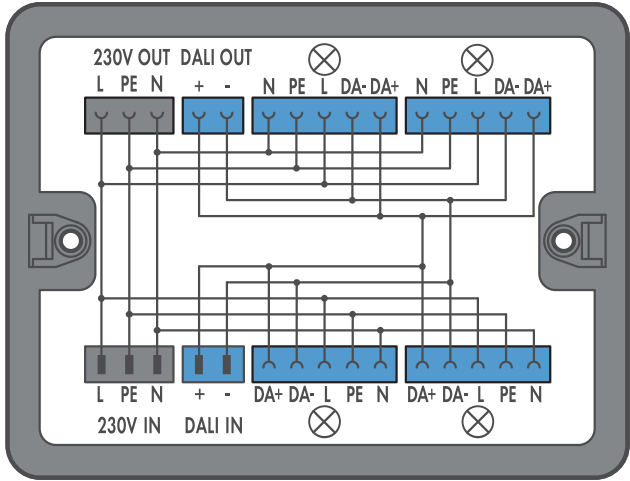

Distribution box; 230 V + DALI		
Color	Item No.	Pack. Unit
● black	899-631/181-000	1


WINSTA® Boxes ▶ 899 Series

400 V + DALI

2 Inputs; 3 Outputs; A-, I-Coding; WINSTA® MINI; WINSTA® MIDI

Description
This WINSTA® Box combines the L1, L2 and L3 phases of the 3-phase current with the DALI signal (separate cable).

Technical Data	
Rated voltage (III / 3)	400 V
Rated impulse voltage (III / 3)	6 kV
Rated current	20 A / 16 A
Internal wiring	2.5 mm² / 1.5 mm² (halogen-free)

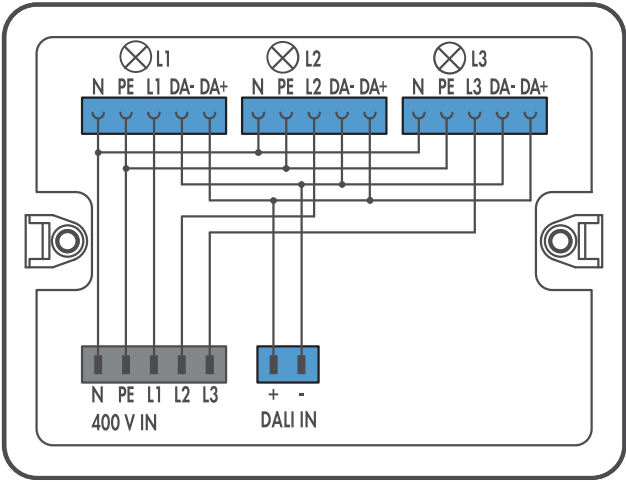


Distribution box; 400 V + DALI		
Color	Item No.	Pack. Unit
☐ white	899-681/145-000	1

400 V + DALI

2 Inputs; 5 Outputs; A-, I-Coding; WINSTA® MINI; WINSTA® MIDI

Description
This WINSTA® Box combines the L1, L2 and L3 phases of the 3-phase current with the DALI signal (separate cable).

Technical Data	
Rated voltage (III / 3)	250 V / 400 V
Rated impulse voltage (III / 3)	4 kV / 6 kV
Rated current	20 A / 16 A
Internal wiring	2.5 mm² / 1.5 mm² (halogen-free)

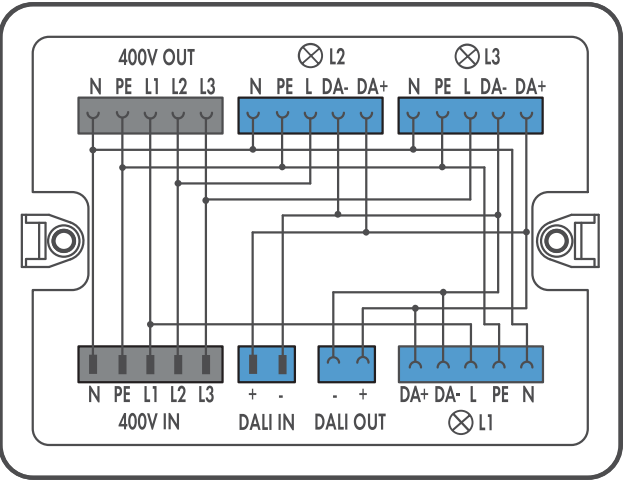

Distribution box; 400 V + DALI		
Color	Item No.	Pack. Unit
☐ white	899-681/147-000	1

(III / 3) Δ Overvoltage category III /
Pollution degree 3

Accessories, 899 Series	Page 359
Coding Overview	Page 372
Approvals, see www.wago.com	

WINSTA® Boxes ▶ 899 Series

400 V + DALI


2 Inputs; 5 Outputs; A-, I-Coding; WINSTA® MINI; WINSTA® MIDI

Description

This WINSTA® Box combines the L1, L2 and L3 phases of the 3-phase current with the DALI signal (separate cable).

Technical Data

Rated voltage (III / 3)	250 V / 400 V
Rated impulse voltage (III / 3)	4 kV / 6 kV
Rated current	20 A / 16 A
Internal wiring	2.5 mm² / 1.5 mm² (halogen-free)

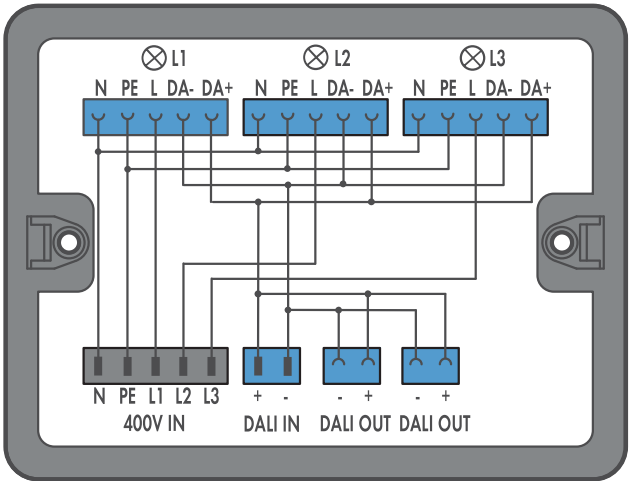

Distribution box; 400 V + DALI		
Color	Item No.	Pack. Unit
● black	899-631/455-000	1

230 V + DALI


1 Input; 5 Outputs; I-Coding; WINSTA® MIDI

Description

This WINSTA® Box connects 5-pole DALI lights.
Both 230 V power supply and DALI bus for light scene control are combined into a single line.

Technical Data

Rated voltage (III / 3)	250 V
Rated impulse voltage (III / 3)	4 kV
Rated current	20 A / 16 A
Internal wiring	2.5 mm² / 1.5 mm² (halogen-free)

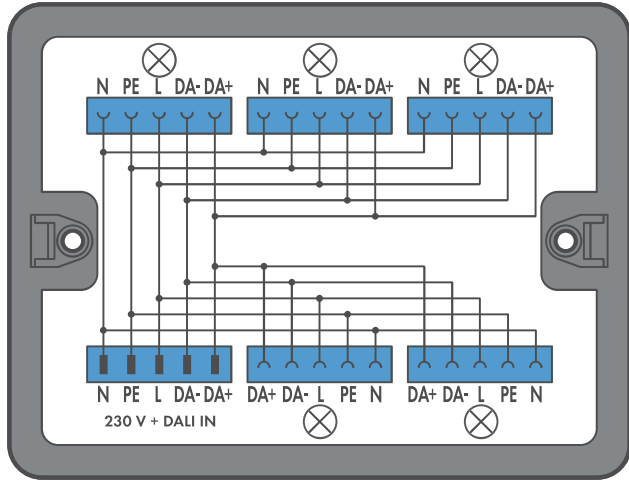

Distribution box; 230 V + DALI		
Color	Item No.	Pack. Unit
● black	899-631/313-000	1

WINSTA® Boxes ► 899 Series

230 V + DALI


1 Input; 7 Outputs; I-Coding; WINSTA® MINI; WINSTA® MIDI

Description

This WINSTA® Box connects 5-pole DALI lights.
Both 230 V power supply and DALI bus for light scene control are combined into a single line. Additionally, three isolated DALI signals are available.

Technical Data

Rated voltage (III / 3)	250 V / 400 V
Rated impulse voltage (III / 3)	4 kV / 6 kV
Rated current	20 A / 16 A
Internal wiring	2.5 mm ² / 1.5 mm ² (halogen-free)

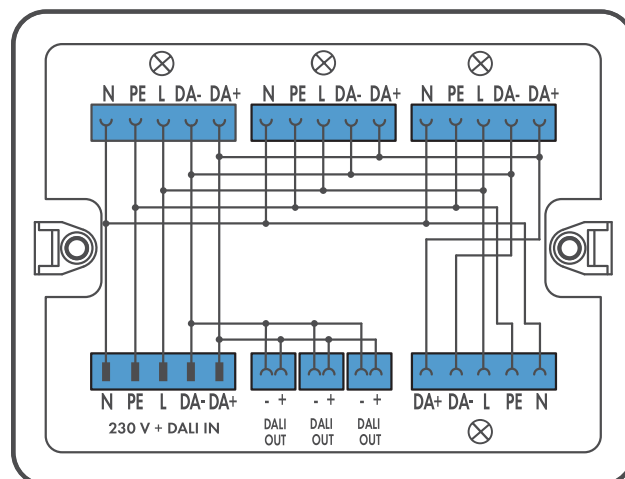

Distribution box; 230 V + DALI

Color	Item No.	Pack. Unit
○ white	899-681/146-000	1

230 V + SMI


2 Inputs, 6 Outputs, A-, B-Coding; WINSTA® MINI; WINSTA® MIDI

Description

This WINSTA® Box connects to 5-pole SMI drives. Power supply is performed via two cables (230 V and SMI).
7

Technical Data

Rated voltage (III / 3)	250 V
Rated impulse voltage (III / 3)	4 kV
Rated current	25 A / 16 A
Internal wiring	4 mm ² / 1.5 mm ²

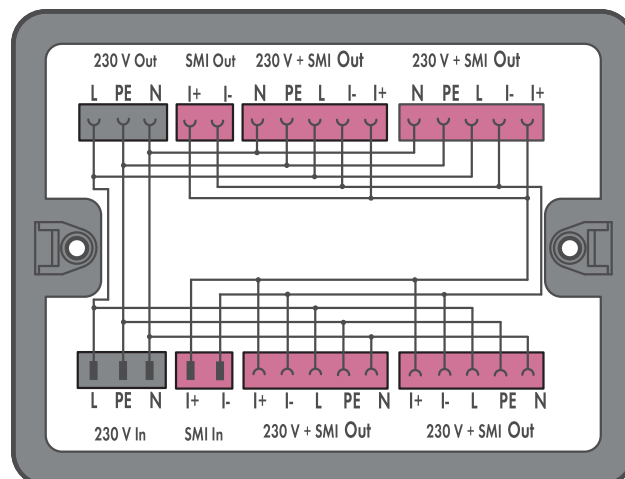

Distribution box; 230 V + SMI

Color	Item No.	Pack. Unit
● black	899-631/405-000	1

(III / 3) △ Overvoltage category III /
Pollution degree 3

Accessories, 899 Series Page 359

Coding Overview Page 372

Approvals, see www.wago.com