
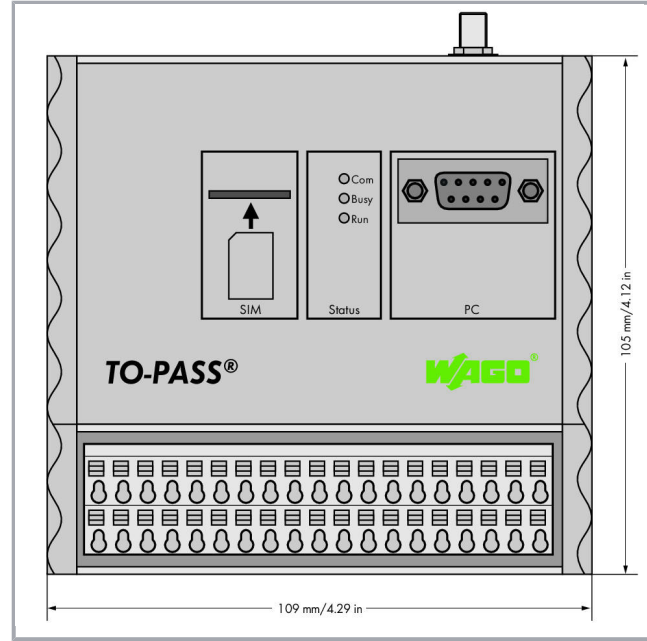


Data sheet | Item number: 761-110

TO-PASS® Compact; 4-channel digital input; Fault indicator; Telecontrol;
1,50 mm²

www.wago.com/761-110

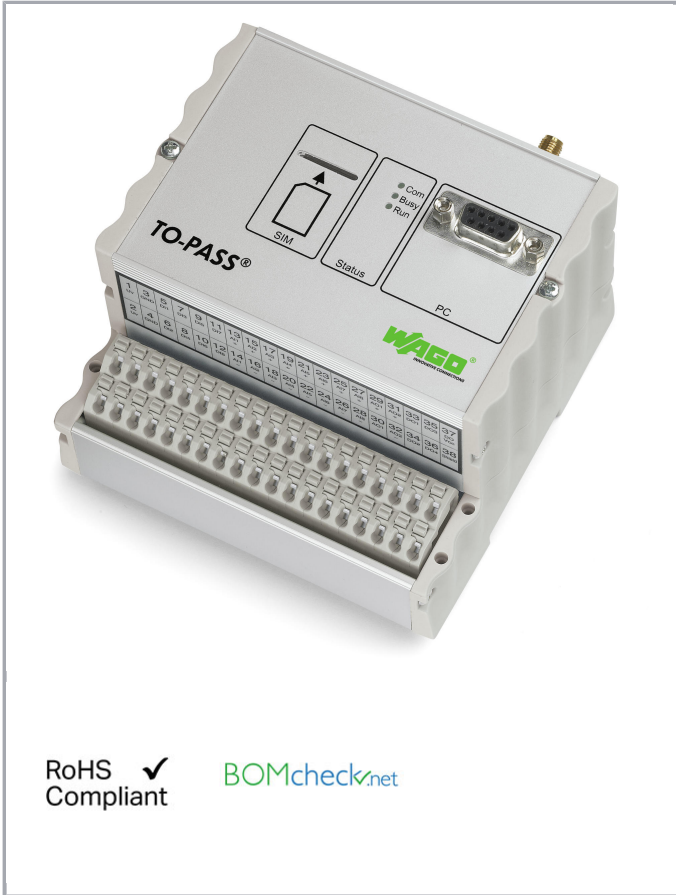


RoHS
Compliant



Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

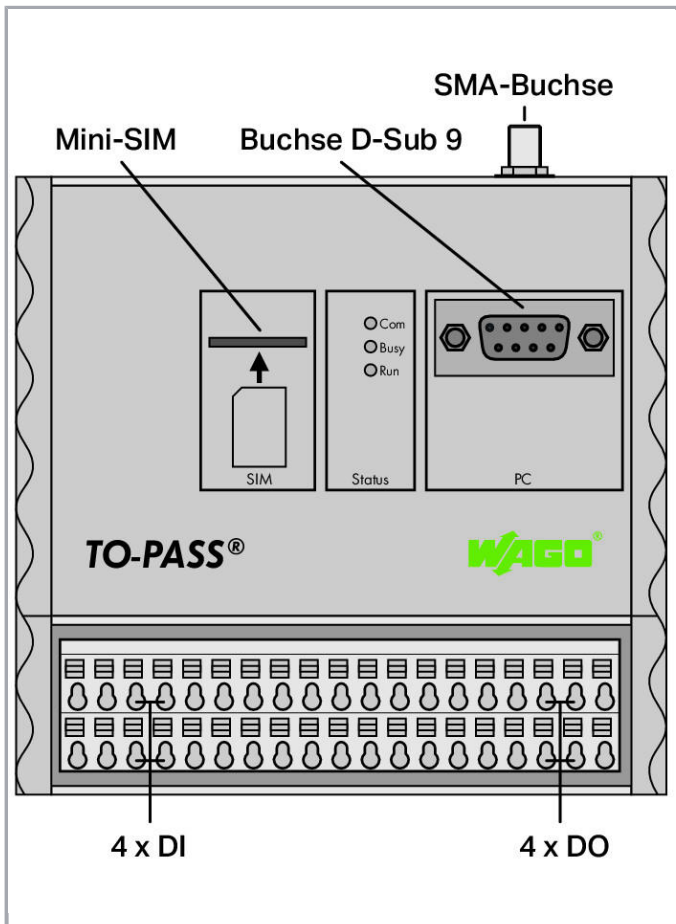

Item description

This compact telecontrol module provides fault detection/indication and monitoring of machines and installations over a GSM network. The module can be used in many countries via an integrated quad-band GSM modem. Messages are sent via SMS, email, fax or phone call. Switching of outputs is performed via SMS.

The module is equipped with four digital inputs and four digital outputs, including an integrated GSM modem. Ideal for applications in distributed stations for temperatures ranging from -20°C to $+70^{\circ}\text{C}$. Ability to mount on DIN-rail and intuitive user software make unit easy to use. Operating voltage ranges from +10 to +30 VDC.

Specialty functions:

- Acknowledgment: Any fault message
- Stand-by: Automatic remote switching of stand-by service
- Remote parameterization: Programming and remote control conveniently performed from the office

Subject to changes. Please also observe the further product documentation!



Data

Technical Data

Services	SMS (bidirectional) Email Fax CSD data transmission
Radio technology	Mobile communications
Frequency band	GSM quad-band
Number of digital inputs	4
Number of digital outputs	4
Input characteristic	Type 3
Input current per channel for signal (1) max.	2.9 mA
Output circuit design	Contacts
Output current per channel	0.5 A
Output current	short-circuit-protected
Voltage range for signal (0)	0 ... 5 VDC
Voltage range for signal (1)	7 ... 30 VDC
SIM card type	Mini-SIM
Number of recipients	4 (PC, SMS, email, phone, fax)
Self consumption	20 mA (closed current); 500 mA (current during transmission)
Supply voltage	DC 10 ... 30 V
Indicators	LED (Com, Busy, Run) green: Communication status, GSM modem, module

Connection data

Connection technology: communication/fieldbus	1 x D-Sub 9 socket
Connection technology: inputs/outputs	8 x Terminal blocks (250 Series) with PUSH WIRE® connection
Connection technology: supply	6 x Terminal blocks (250 Series) with PUSH WIRE® connection
Connection technology: Antenna	1 x SMA socket
Solid conductor	0,5 ... 1,5 mm ² / 22 ... 14 AWG
Fine-stranded conductor	0,5 ... 1,5 mm ² / 22 ... 14 AWG
Strip length	9 ... 10 mm / 0.35 ... 0.39 inch

Geometrical Data

Width	109 mm / 4.291 inch
Height from upper-edge of DIN-rail	78 mm / 3.071 inch

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.

Depth	105 mm / 4.134 inch
-------	---------------------

Mechanical data

Mounting type	DIN-35 rail
---------------	-------------

Material Data

Weight	407 g
--------	-------

Environmental Requirements

Surrounding air temperature (operation)	-20 ... 70 °C
---	---------------

Surrounding air temperature (storage)	-40 ... 85 °C
---------------------------------------	---------------

Protection type	IP20
-----------------	------

Vibration resistance	4g per IEC 60068-2-6
----------------------	----------------------

Shock resistance	15g per IEC 60068-2-27
------------------	------------------------

EMC immunity to interference	per EN 61000-6-2
------------------------------	------------------

EMC emission of interference	per EN 61000-6-3
------------------------------	------------------

Commercial data

Product Group	27 (Special components I/O)
---------------	-----------------------------

Packaging type	BOX
----------------	-----

Country of origin	DE
-------------------	----

GTIN	4050821079743
------	---------------

Customs tariff number	85389091890
-----------------------	-------------

Counterpart

Compatible products

software



Item no.: 759-930
TO-PASS® Configurator; CD

www.wago.com/759-930















General accessories



Item no.: 758-961
Self-adhesive antenna; with 2.5m cable and SMA straight plug; GSM/UMTS/LTE/Bluetooth®/WLAN; 699- www.wago.com/758-961
960, 1710-2690 MHz

Item no.: 758-962

Subject to changes. Please also observe the further product documentation!

	Theft-proof antenna; with 1m cable and SMA straight plug; GSM/ UMTS/ BT/ WLAN; 850/ 900/ 1800/ 1900/ 2100/ 2400 MHz	www.wago.com/758-962
	Item no.: 758-963 Rod antenna; with 1m cable and SMA straight plug; GSM UMTS; 850/ 900/ 1800/ 1900/ 2100 MHz	www.wago.com/758-963
	Item no.: 758-964 Adaptor; FME plug to SMA plug; for antennas with FME socket to devices with SMA socket	www.wago.com/758-964
	Item no.: 758-965 Magnetic foot antenna; with 2.5m cable and SMA straight plug; GSM UMTS; 850/ 900/ 1800/ 1900/ 2100 MHz	www.wago.com/758-965
	Item no.: 758-966 Theft-proof combination antenna; with 2.5m cable and SMA straight plug; GSM UMTS; 850/ 900/ 1800/ 1900/ 2100 MHz	www.wago.com/758-966
	Item no.: 758-967 Adaptor; FME socket to SMA socket; GSM/UMTS/LTE/Bluetooth®/WLAN	www.wago.com/758-967
	Item no.: 758-968 Adaptor; SMA plug to SMA plug; GSM/UMTS/LTE/Bluetooth®/WLAN	www.wago.com/758-968
	Item no.: 758-969 RF Lighting Protection; SMA socket to SMA socket; GSM/UMTS/LTE/Bluetooth®/WLAN	www.wago.com/758-969
	Item no.: 758-970/000-100 Connecting cable with SMA socket and SMA plug; Cable length 1 m; Cable type H155; GSM/UMTS/LTE /Bluetooth®/WLAN	www.wago.com/758-970 /000-100
	Item no.: 758-970/000-1000 Connecting cable with SMA socket and SMA plug; Cable length 10 m; Cable type H155; GSM/UMTS /LTE/Bluetooth®/WLAN	www.wago.com/758-970 /000-1000
	Item no.: 758-970/000-300 Connecting cable with SMA socket and SMA plug; Cable length 3 m; Cable type H155; GSM/UMTS/LTE /Bluetooth®/WLAN	www.wago.com/758-970 /000-300
	Item no.: 758-970/000-500 Connecting cable with SMA socket and SMA plug; Cable length 5 m; Cable type H155; GSM/UMTS/LTE /Bluetooth®/WLAN	www.wago.com/758-970 /000-500
	Item no.: 758-971 Antenna splitter with 3 SMA sockets; GSM/UMTS/LTE/Bluetooth®/WLAN	www.wago.com/758-971
	Item no.: 761-9005 USB adapter; with 1m connection cable	www.wago.com/761-9005

Downloads

Documentation

Manual

Compact telecontrol module

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.



4 digital inputs, 4 digital outputs	V 2.0.0	pdf 2.5 MB	Download
System description, telecontrol modules S, M, Compact	V 1.0.1	pdf 1.0 MB	Download
System Description			
TO-PASS® Telecontrol Technology – General Product Information		pdf 745.3 kB	Download

Engineering-Software

Configuration and Commissioning Software

(759-930) TO-PASS Konfigurationssoftware / Serie 761	2.19 Jan 29, 2016	zip 2.6 MB	Download
--	----------------------	---------------	----------

CAD/CAE-Data

CAE data

EPLAN Data Portal 761-110		URL	Download
WSCAD Universe 761-110		URL	Download

Handling Instructions

Subject to changes. Please also observe the further product documentation!